


# ACTIVE Trainer

Self Contained. Space Saving

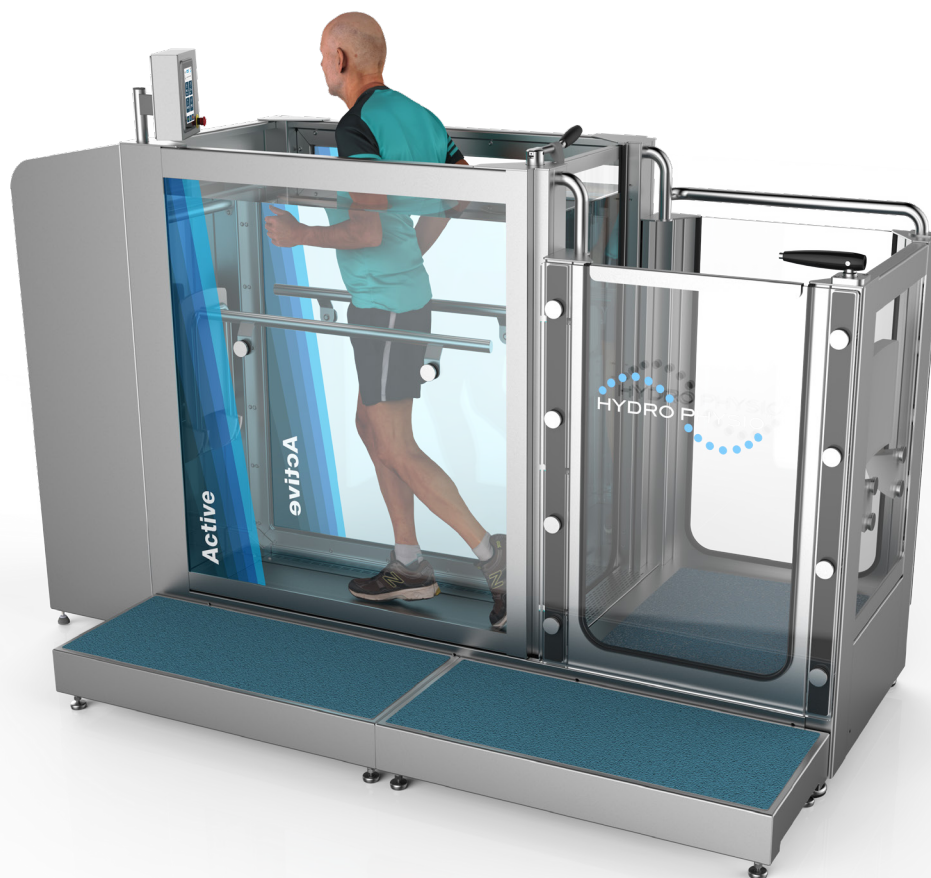

Platform coverings may vary from illustrated.  
Please check colour options when ordering.

The ACTIVE Trainer system includes a treadmill chamber, with integral plant equipment and water storage.

Minimum room sizes:



Minimum ceiling height: 2.5m


Minimum door height: 2m

Minimum door width: 1m


Minimum space required: 20m<sup>2</sup>

Minimum floor loading: 1250kg/m<sup>2</sup>

## Equipment Features

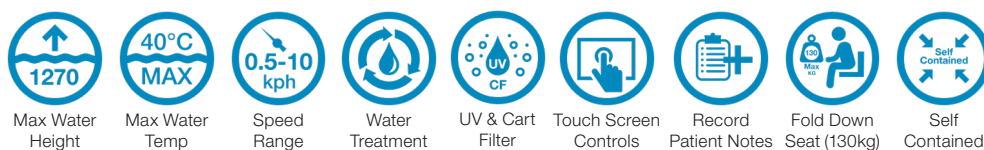

## Additional Options

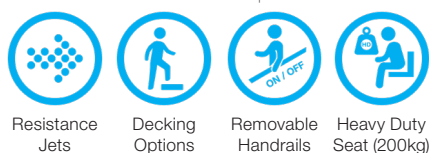

# FEATURES

- [+] OUTWARD OPENING DOOR WITH PATENTED LATCH DEVICE
- [+] ISO 13485 COMPLIANT
- [+] MEDICAL GRADE STAINLESS STEEL CONSTRUCTION
- [+] LARGE VIEWING PANELS FOR PATIENT MONITORING
- [+] COMMERCIAL CARTRIDGE FILTRATION SYSTEM
- [+] UV FILTRATION
- [+] CHEMICAL FEEDER
- [+] STRIDE LENGTH AND WATER DEPTH INDICATORS
- [+] TREADMILL SYSTEM MONITORING
- [+] 7" TOUCH SCREEN
- [+] FOLD DOWN SEAT (130kg capacity)
- [+] SELF CONTAINED, SPACE SAVING DESIGN
- [+] OPERATOR PLATFORMS

# OPTIONS

- [+] RESISTANCE JETS
- [+] NON SLIP SURFACE COLOUR OPTIONS
- [+] ADDITIONAL HANDRAILS (removable)
- [+] HEAVY DUTY SEAT (200kg capacity)

# TECHNICAL SPECIFICATION

|  |   |
|--|---|
| Maximum load                                       | 200kg (440lbs) assuming 50% weight bearing in water |
| Maximum water depth                                | 620 (25") - 1270mm (50")                            |
| Speed range  | 0.5 - 10kph (0.3 - 6.2mph)                          |
| Fill / empty times                                 | Approx 3½ minutes to max depth                      |
| Temperature range                                  | From ambient - 40°C (104°F)                         |
| Trainer dimensions (Excluding display)             | L 2755mm (108") x W 880mm (35") x H 1630mm (64")    |
| Complete system weight                             |   |
| Dry  | 900kg (1984 lbs)                                    |
| Full   | 2400kg (5291 lbs)                                   |
| Capacity   | 1500 litres (330 gals, 396 US gals)                 |
| Max distance between treadmill and plant equipment | 10m (394")  |
| Power  | 400V 3 phase neutral & earth 50/60hz 40A per phase  |



+ 44 (0)1952 885112      Broseley, Telford,  
lifestyle@HYDROPHYSIO.com      Shropshire, TF12 5JA.  
www.HYDROPHYSIO.com      United Kingdom.

Over 900 HYDRO PHYSIO Systems Installed Worldwide



Designed & Manufactured In Great Britain

Sold through our International Distributor Network.

Call us to get help planning your project with site surveys, layout design and installation.

# CORE Trainer



## The New Foundation For Aquatic Therapy Treadmills



Platform coverings may vary from illustrated.  
Please check colour options when ordering.

The CORE Trainer system includes a treadmill chamber, plant equipment and a water storage tank (sited in separate plant room).

Minimum room sizes:



Minimum ceiling height: 2.5m

Minimum door height: 2m

Minimum door width: 1m

Minimum space required: 30m<sup>2</sup>

Minimum floor loading: 1250kg/m<sup>2</sup>

### Equipment Features



Max Water Height



Max Water Temp



Speed Range



Water Treatment



UV & Cart Filter



Touch Screen Controls



Portable Devices



Record Patient Notes



Fold Down Seat (130kg)

### Additional Options



Decking Options



Removable Handrails



Heavy Duty Seat (200kg)

# FEATURES

- [+] OUTWARD OPENING DOOR WITH PATENTED LATCH DEVICE
- [+] ISO 13485 COMPLIANT
- [+] MEDICAL GRADE STAINLESS STEEL CONSTRUCTION
- [+] LARGE VIEWING PANELS FOR PATIENT MONITORING
- [+] COMMERCIAL CARTRIDGE FILTRATION SYSTEM
- [+] UV FILTRATION
- [+] CHEMICAL FEEDER
- [+] STRIDE LENGTH AND WATER DEPTH INDICATORS
- [+] TREADMILL SYSTEM MONITORING
- [+] 7" TOUCH SCREEN (includes screen mirroring for portable devices & the facility to record patient notes)
- [+] FOLD DOWN SEAT (130kg capacity)

# OPTIONS

- [+] SIDE PLATFORMS FORMATS
- [+] NON SLIP SURFACE COLOUR OPTIONS
- [+] ACCESS RAMP
- [+] ADDITIONAL HANDRAILS (removable)
- [+] HEAVY DUTY SEAT (200kg capacity)

# TECHNICAL SPECIFICATION

|  |  |
|--|--|
| Maximum load                                       | 250kg (550lbs) assuming 50% weight bearing in water  |
| Maximum water depth                                | 0 - 1270mm (50")                                     |
| Speed range  | 0.5 - 10kph (0.3 - 6.2mph)                           |
| Fill / empty times                                 | Approx 2½ minutes to max depth                       |
| Temperature range                                  | From ambient - 40°C (104°F)                          |
| Trainer dimensions (Excluding display)             | L 1390mm (54.5") x W 860mm (34") x H 1630mm (64")    |
| Chamber Weight                                     | 480kg (1058lbs)                                      |
| Capacity   | 1450 litres (319 gals, 383 US gals)                  |
| Max distance between treadmill and plant equipment | 10m (394")   |
| Power  | 400V 3 phase neutral and earth 50/60hz 40A per phase |



+ 44 (0)1952 885112      Broseley, Telford,  
lifestyle@HYDROPHYSIO.com      Shropshire, TF12 5JA.  
www.HYDROPHYSIO.com      United Kingdom

Over 900 HYDRO PHYSIO Systems Installed Worldwide



FM 25162

MD 516639

OHS 672496

Designed & Manufactured In Great Britain

Sold through our International Distributor Network.


Call us to get help planning your project with site surveys, layout design and installation.

Issue Med-19

# FOCUS



## The Benchmark of the HYDRO PHYSIO Range

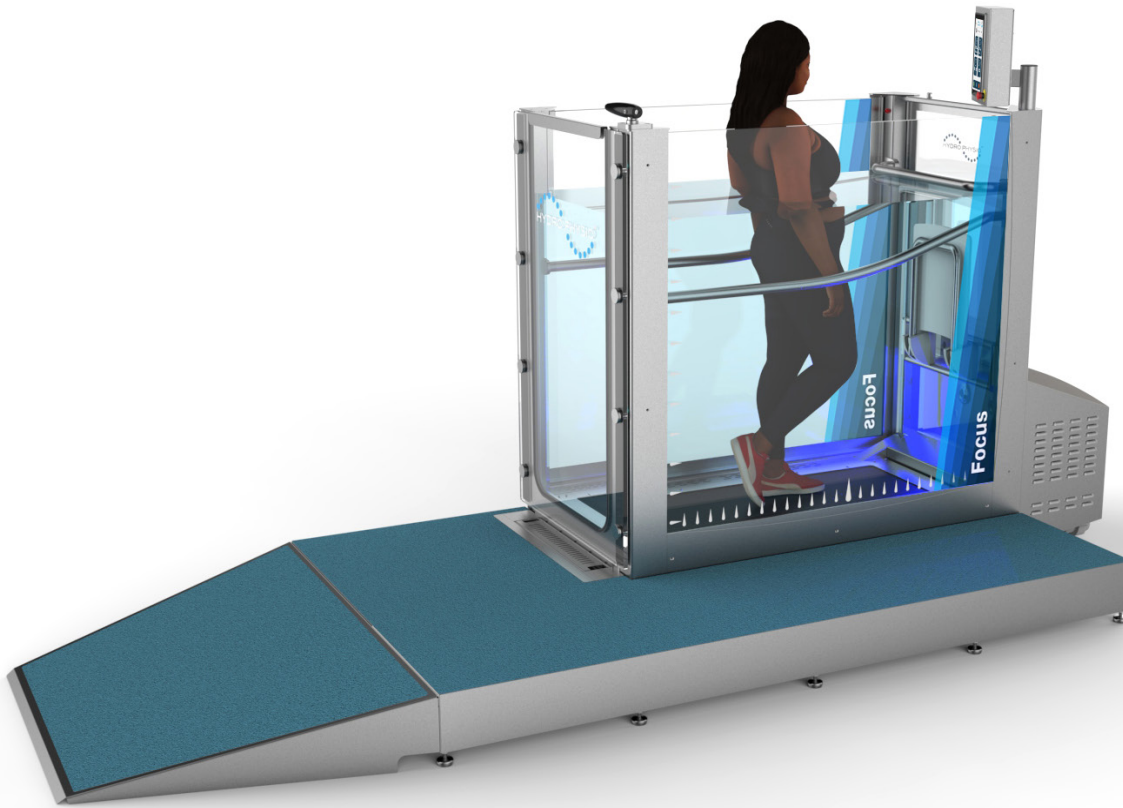

Platform coverings may vary from illustrated.  
Please check colour options when ordering.

The FOCUS system includes a treadmill chamber with platform and ramp (as shown), plant equipment and a water storage tank (sited in separate plant room).

Minimum room sizes:



Minimum ceiling height: 2.5m


Minimum door height: 2m

Minimum door width: 1m


Minimum space required: 30m<sup>2</sup>

Minimum floor loading: 1250kg/m<sup>2</sup>

### Equipment Features

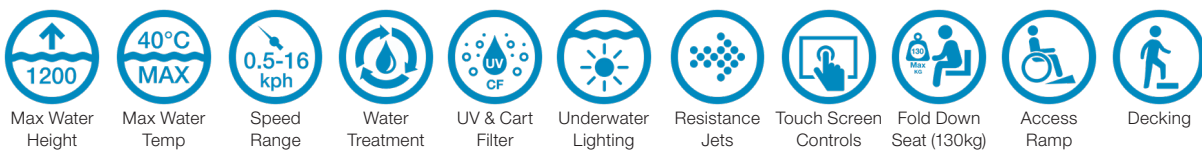

### Options

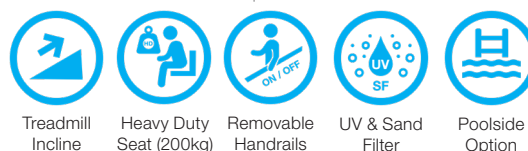

# FEATURES

- [+] OUTWARD OPENING DOOR WITH PATENTED LATCH DEVICE
- [+] ISO 13485 COMPLIANT
- [+] MEDICAL GRADE STAINLESS STEEL CONSTRUCTION
- [+] STRUCTURAL GLASS WITH 360° MONITORING
- [+] COMMERCIAL CARTRIDGE FILTRATION SYSTEM
- [+] UV FILTER
- [+] CHEMICAL FEEDER
- [+] DUAL SPEED RESISTANCE JETS
- [+] STRIDE LENGTH AND WATER DEPTH INDICATORS
- [+] TREADMILL SYSTEM MONITORING
- [+] 10" TOUCH SCREEN (Includes enhanced system monitoring, pre-set and programmable function controls.)
- [+] OPERATOR PLATFORM WITH ACCESS RAMP
- [+] BLUE LED UNDERWATER LIGHTING
- [+] FOLD DOWN SEATING (130kg capacity)

# OPTIONS

- [+] POWERED TREADMILL INCLINE (8% gradient)
- [+] ADDITIONAL HANDRAILS (Removable)
- [+] HEAVY DUTY FOLD DOWN SEATING (200kg capacity)
- [+] POOLSIDE VERSION
- [+] CUSTOMISED PLATFORM
- [+] SAND FILTRATION SYSTEM (Instead of cartridge)

# TECHNICAL SPECIFICATION

|  |  |
|--|--|
| Maximum load                                       | 250kg (550lbs) assuming 50% weight bearing in water  |
| Maximum water depth                                | 0 - 1200mm (48")                                     |
| Speed range  | 0.5 - 16kph (0.3 - 10mph)                            |
| Fill / empty times                                 | Approx 3½ minutes to max depth                       |
| Temperature range                                  | From ambient - 40°C (104°F)                          |
| Trainer dimensions (Excluding display)             | L 1640mm (65") x W 880mm (71") x H 1650mm (65")      |
| Complete system weight                             |  |
| Dry  | 1050kg (2315 lbs)                                    |
| Full   | 2850kg (6283 lbs)                                    |
| Capacity   | 1800 litres (396 gals, 476 US gals)                  |
| Max distance between treadmill and plant equipment | 10m (394")   |
| Power  | 400V 3 phase neutral and earth 50/60hz 40A per phase |



+ 44 (0)1952 885112      Broseley, Telford,  
lifestyle@HYDROPHYSIO.com      Shropshire, TF12 5JA.  
www.HYDROPHYSIO.com      United Kingdom.

## Over 900 HYDRO PHYSIO Systems Installed Worldwide



Designed & Manufactured In Great Britain


Sold through our International Distributor Network.

Call us to get help planning your project with site surveys, layout design and installation.



# LIFESTYLE

## The Ultimate Hydrotherapy System

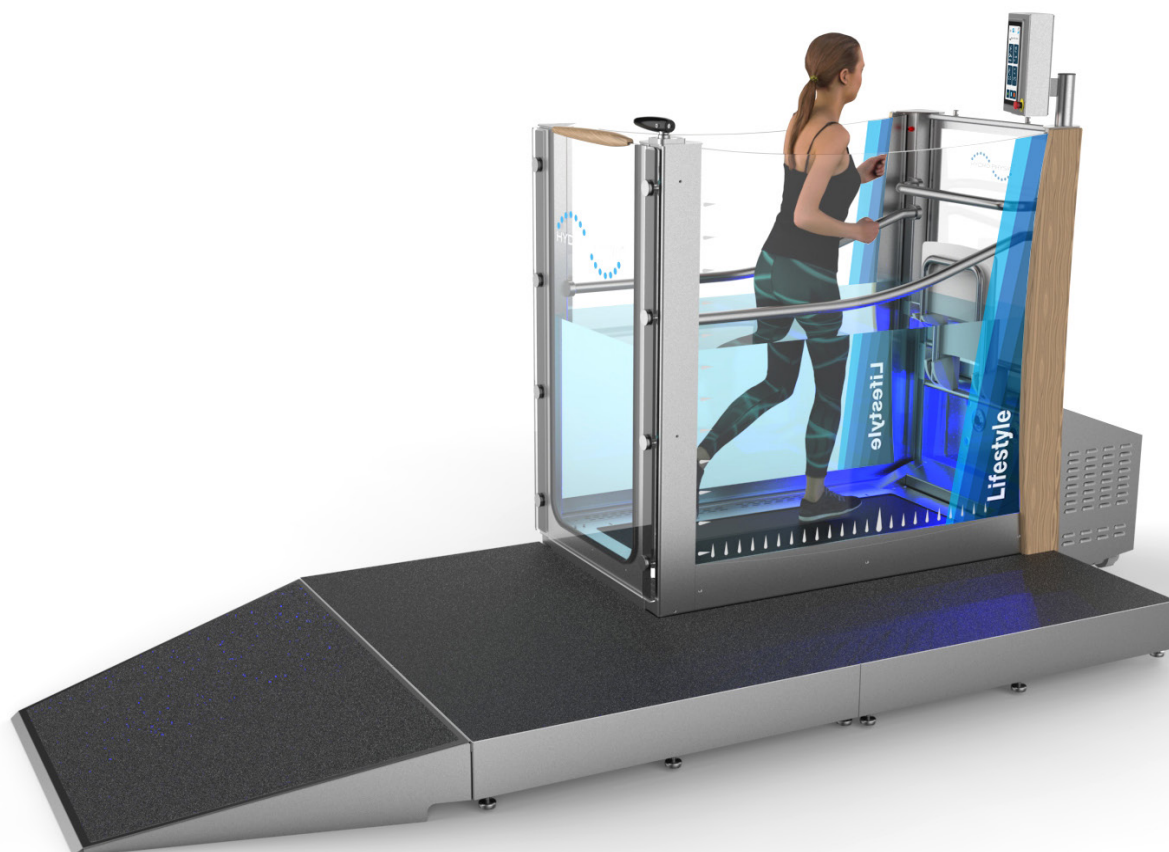

Platform coverings may vary from illustrated.  
Please check colour options when ordering.


The LIFESTYLE system includes a treadmill chamber with platform and ramp (as shown), plant equipment and a water storage tank (sited in separate plant room).

Minimum room sizes:



Minimum ceiling height: 2.5m  
Minimum door height: 2m  
Minimum door width: 1m  
Minimum space required: 32m<sup>2</sup>  
Minimum floor loading: 1250kg/m<sup>2</sup>

### Equipment Features

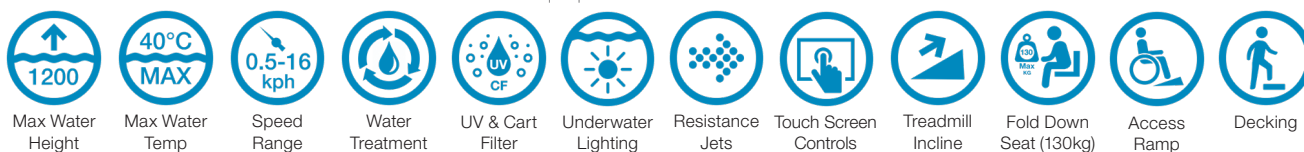

### Options



# FEATURES

- [+] OUTWARD OPENING DOOR WITH PATENTED LATCH DEVICE
- [+] ISO 13485 COMPLIANT
- [+] MEDICAL GRADE STAINLESS STEEL CONSTRUCTION
- [+] STRUCTURAL GLASS WITH 360° MONITORING
- [+] COMMERCIAL CARTRIDGE FILTRATION SYSTEM
- [+] UV FILTRATION
- [+] DUAL SPEED RESISTANCE JETS
- [+] STRIDE LENGTH AND WATER DEPTH INDICATORS
- [+] TREADMILL SYSTEM MONITORING
- [+] 10" TOUCH SCREEN (Includes enhanced system monitoring, pre-set and programmable function controls)
- [+] OPERATOR PLATFORM WITH ACCESS RAMP
- [+] CHEMICAL FEEDER
- [+] TREADMILL INCLINE (8% gradient)
- [+] BLUE LED UNDERWATER LIGHTING
- [+] FOLD DOWN SEATING (130kg capacity)

# OPTIONS

- [+] ADDITIONAL HANDRAILS (Removable)
- [+] HEAVY DUTY FOLD DOWN SEATING (200kg capacity)
- [+] CUSTOMISED PLATFORM
- [+] POOLSIDE VERSION
- [+] SAND FILTRATION SYSTEM (Instead of cartridge)

# TECHNICAL SPECIFICATION

|  |   |
|--|---|
| Maximum load                                       | 250kg (550lbs) assuming 50% weight bearing in water |
| Maximum water depth                                | 0 - 1200mm (48")                                    |
| Speed range  | 0.5 - 16kph (0.3 - 10mph)                           |
| Fill / empty times                                 | Approx 3½ minutes to max depth                      |
| Temperature range                                  | From ambient - 40°C (104°F)                         |
| Trainer dimensions (Excluding display)             | L 1675mm (66") x W 900mm (35") x H 1740mm (69")     |
| Complete system weight                             |   |
| Dry  | 1050kg (2315 lbs)                                   |
| Full   | 2850kg (6283 lbs)                                   |
| Capacity   | 1800 litres (396 gals, 476 US gals)                 |
| Max distance between treadmill and plant equipment | 10m (394")  |
| Power  | 400V 3 phase neutral & earth 50/60hz 30A per phase  |



+ 44 (0)1952 885112      Broseley, Telford,  
lifestyle@HYDROPHYSIO.com      Shropshire, TF12 5JA.  
www.HYDROPHYSIO.com      United Kingdom.

Over 900 HYDRO PHYSIO Systems Installed Worldwide



Designed & Manufactured In Great Britain

Sold through our International Distributor Network.


Call us to get help planning your project with site surveys, layout design and installation.



# PRO-TRAINER



## The Ultimate Hydrotherapy System For Athletes

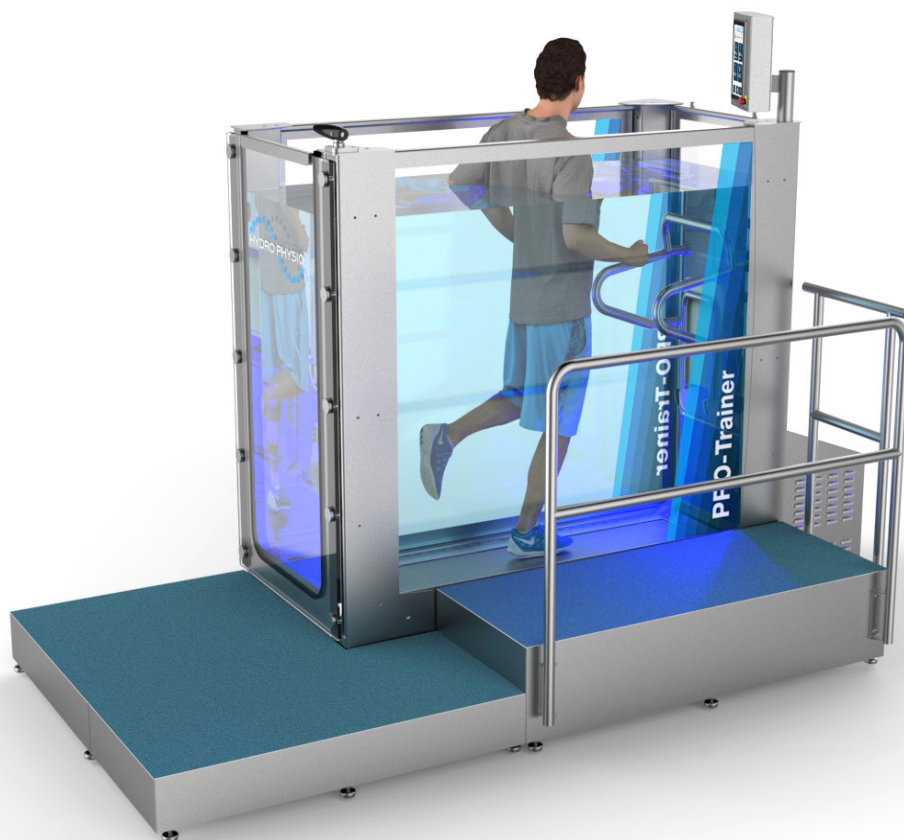

Platform coverings may vary from illustrated.  
Please check colour options when ordering.


The PRO-Trainer system includes a treadmill chamber with platform (as shown), plant equipment and water storage tanks (sited in a separate plant room).

Minimum room sizes:




Minimum ceiling height: 2.5m  
Minimum door height: 2m  
Minimum door width: 1.3m  
Minimum space required: 36m<sup>2</sup>  
Minimum floor loading: 1750kg/m<sup>2</sup>

### Equipment Features

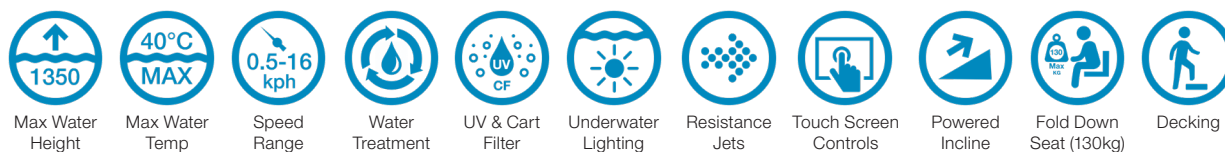

### Options

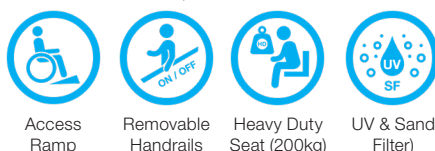

# FEATURES

- [+] OUTWARD OPENING DOOR WITH PATENTED LATCH DEVICE
- [+] ISO 13485 COMPLIANT
- [+] MEDICAL GRADE STAINLESS STEEL CONSTRUCTION
- [+] STRUCTURAL GLASS WITH 360° MONITORING
- [+] 10" TOUCH SCREEN CONTROLS ON ADJUSTABLE SWIVEL ARM
- [+] 2 X WATER STORAGE TANKS
- [+] DUAL SPEED RESISTANCE JETS
- [+] FOLD DOWN SEATING (130kg capacity)
- [+] OPERATOR PLATFORM
- [+] CHEMICAL FEEDER
- [+] COMMERCIAL CARTRIDGE FILTRATION SYSTEM
- [+] UV FILTRATION
- [+] TREADMILL SYSTEM MONITORING
- [+] PRE-SET AND PROGRAMMABLE FUNCTION CONTROLS
- [+] POWERED TREADMILL INCLINE (8% gradient)
- [+] BLUE LED UNDERWATER LIGHTING

# OPTIONS

- [+] ADDITIONAL HANDRAILS (Removable)
- [+] HEAVY DUTY FOLD DOWN SEATING (200kg capacity)
- [+] WHEELCHAIR ACCESS RAMP
- [+] CUSTOMISED PLATFORM
- [+] SAND FILTRATION SYSTEM (Instead of cartridge)

# TECHNICAL SPECIFICATION

|  |   |
|--|---|
| Maximum load                                       | 250kg (550lbs) assuming 50% weight bearing in water |
| Maximum water depth                                | 0 - 1350mm (53")                                    |
| Speed range  | 0.5 - 16kph (0.3 - 10mph)                           |
| Fill / empty times                                 | Approx 2½ minutes to max depth                      |
| Temperature range                                  | From ambient - 40°C (104°F)                         |
| Trainer dimensions (Excluding display)             | L 1900mm (75") x W 880mm (35") x H 1800mm (71")     |
| Complete system weight                             |   |
| Dry  | 1300kg (2866 lbs)                                   |
| Full   | 3500kg (7716 lbs)                                   |
| Capacity   | 2200 litres (484 gals, 581 US gals)                 |
| Max distance between treadmill and plant equipment | 10m (394")  |
| Power  | 400V 3 phase neutral & earth 50/60hz 40A per phase  |



+ 44 (0)1952 885112      Broseley, Telford,  
lifestyle@HYDROPHYSIO.com      Shropshire, TF12 5JA.  
www.HYDROPHYSIO.com      United Kingdom.

## Over 900 HYDRO PHYSIO Systems Installed Worldwide



Designed & Manufactured In Great Britain

Sold through our International Distributor Network.

Call us to get help planning your project with site surveys, layout design and installation.